


DISTRIBUTION MANIFOLDS VALVES



DIRECT MOUNT (Pipe to Flange)

This Distribution Manifold valves are made by extruded stainless steel body rated for 6 000 psig (414 bar) working pressure. Fewer potential leak points than conventional distribution manifolds. Compact, versatile manifold for gas and liquid applications. Mounting holes through the manifold to reduce stress on the piping system. Four to eighteen needle valves / outlet connections.

IPS-MV-DM-01

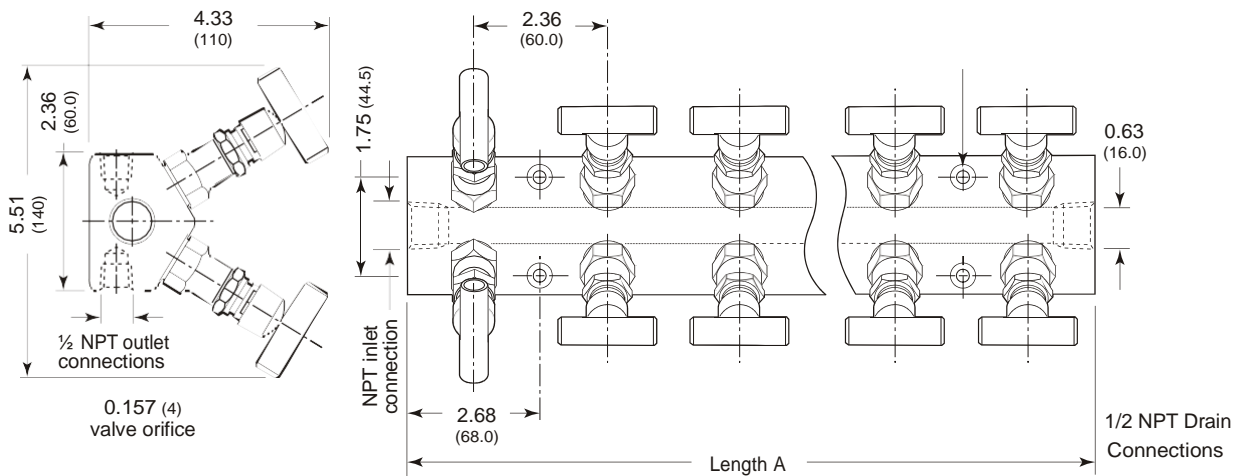

Dimensions

Dimensions, in inches (millimeters), are for reference only and are subject to change.

Standard connection

Product	Inlet Connection	Outlet Connection	Drain Connection
IPS-MV-DM-01	1/2" NPT female	1/2" NPT female	1/2" NPT female

Number of Outlet Connections	Length A in. (mm)
4	5.35 (136)
6	7.72 (196)
8	10.1 (256)
10	12.4 (316)
12	14.8 (376)
14	17.2 (436)
16	19.5 (496)
18	21.9 (556)



Industrix Precise Solutions Private Limited

Room No – 303, Bhumika Residency, Plot No-21, Sector-20, Roadpali, Kalamboli, Panvel (Tal.), Raigad (Dist.), Maharashtra, India – 410218.

Mobile: +91 99309 98399 / +91 99674 97447

E-mail: admin@ipspl.in / sales@ipspl.in Website: www.ipspl.in

CIN : U52399MH2021PTC368555